

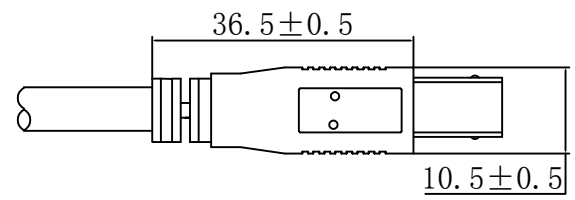
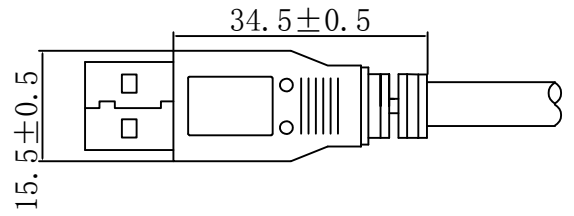
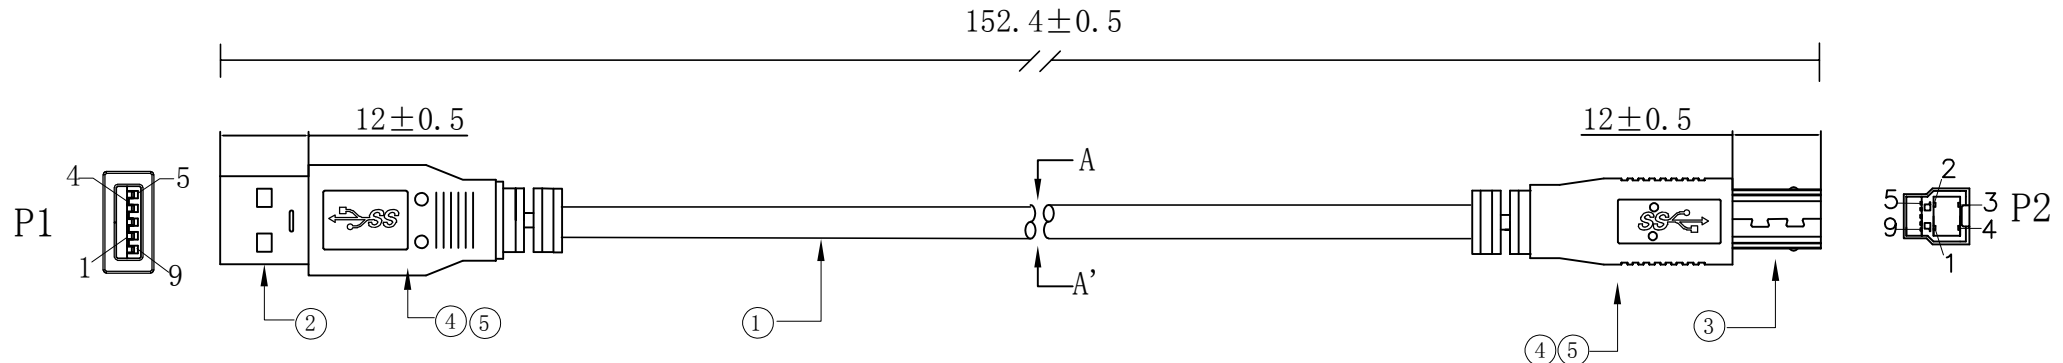


NOTE: All materials compliant with RoHS, REACH and PrO65 standards

REV.	DATE	ECN NO.	DESCRIPTION
A0	2021. 04. 17	/	/

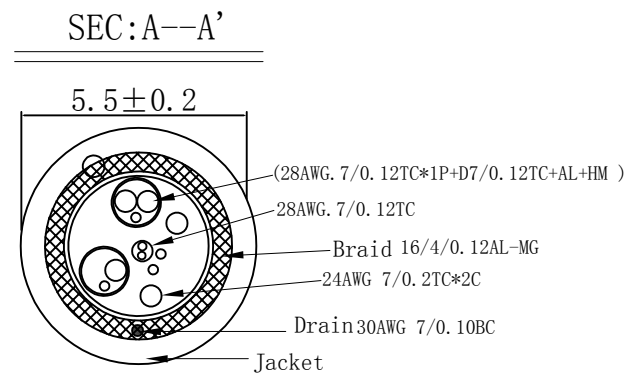

PIN ASSIGNMENT

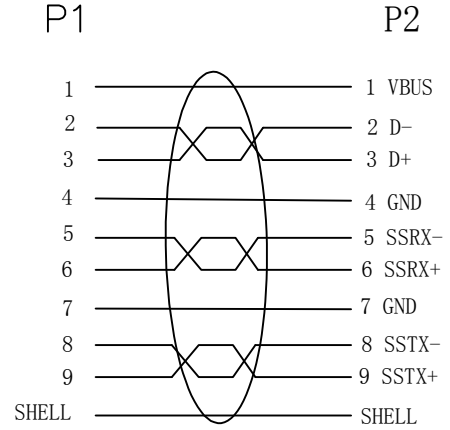

Testing Requirements :

- 100% real machine screen test
- Insulation resistance : 10MΩ MIN (300DC/0.01s).
- Conduction impedance : 2Ω MAX.

NO.	NAME	SPECIFICATIONS	Q' TY	UNIT
5	OUTER MOLDING	Black PVC 40P	10	G
4	INNER MOLDING	MG70 LDPE transparent color	10	G
3	CONNECTOR	USB3.0 B/M connector blue core/nickel plated iron case/pin gold plated	1	PCS
2	CONNECTOR	USB3.0A /M connector blue core/nickel plated iron case/pin gold plated	1	PCS
1	CABLE	USB3.0 (28AWG. 7/0. 12TC*1P+D7/0. 12TC+AL+HM ) *2+ (28AWG. 7/0. 12TC)*1P+ 24AWG 7/0. 2TC*2C+ADB+PVC OD:5.5MM BLACK 152.4mm	AR	MM

	<b>MODEL #:</b>	USB3.0-ABM-0.5FT
	<b>PAGE:</b>	1 / 1
	<b>NOTES:</b>	
<b>DATE:</b>		<b>SCALE:</b> 1mm = 1mm
<b>UNIT:</b> mm	<b>TOLERANCE:</b> +/- 0.15 mm	
<b>SITE:</b> coolgear.com	<b>CONTACT:</b> support@coolgear.com	

F  
E  
D  
C  
B  
A

8 7 6 5 4 3 2 1